

# STAY

my way

## STAYmyway Cylinder

STAYmyway Apartments will help you manage your rentals more efficiently and comfortably.



### COMPATIBLE WITH ANY DOOR LOCK

· STAYmyway Cylinder is compatible with any European format door lock and any door width, whether or not you have a door shield.

### IP DEGREES OF PROTECTION

· STAYmyway Cylinder offers different degrees of IP protection, from protected applications to uncovered environments subject to high humidity, salinity and temperature.

### SECURITY KEY

· Each STAYmyway Cylinder comes with two security keys that will allow you to unlock the door in the event of any problem.

### CERTIFIED BY PROSEGUR

· All the technology used in STAYmyway has been certified by PROSEGUR, an industry leader in security.

### UNLOCK HISTORY

· STAYmyway Cylinder automatically saves the unlock history, which can be downloaded at any time.

## Unlock doors via smartphone and NFC cards



**Change out your conventional lock cylinder for a smart STAYmyway cylinder**, so your guests can **access your properties using their cell phones**.

In addition, your guests can gain entry **using NFC cards** which can be canceled if lost or not returned.

If your guests can't or don't want to use their phone to gain entry, **you can unlock any STAYmyway device** remotely from wherever you are. You will always have a security key in the event the door remains locked or low on batteries.

## Easy Installation



Installing the **STAYmyway Cylinder** is as easy as installing a **conventional lock cylinder** so it doesn't require a certified technician or professional locksmith.

## Save time and money




**The STAYmyway Cylinder** allows you **to send digital keys to your guests** that will only **unlock** or **remain functional** during their **stay**, saving you extra trips to drop off or pick up keys.

## Unlock History



From the **control panel** you can access the **unlock history**, so you always know who has entered your property and when they entered. In addition, **you can activate and deactivate any key with just one click**.

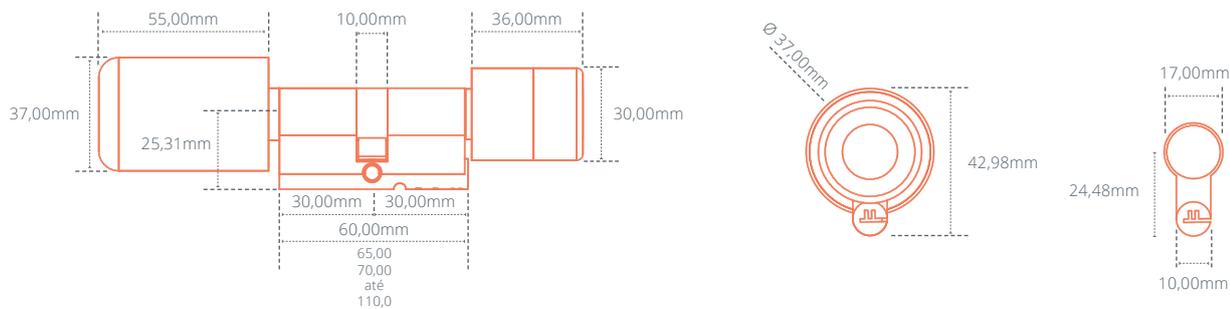

Stainless Steel	Robust	Master Card
Memory	Mifare 1k, S70 Compatible w/ NFC	Time unlocked: 8s
Emergency Unlock: Traditional Key	Data Collection	Calendar
Predefined entry	Data Logging capacity: 500	Daily Backup
Black Listed Cards	∞ (infinite) users Management Card	User Levels
Reset	LED: Blue / Red Low Battery Alert	Certifications: CE RoHS
Wireless	LED: Azul / Rojo	Static Power Consumption: 60µA
Door Width: 30-90mm	Low battery alert	3.6V Li-SoCL2
Power Consumption: 150mA	Humidity: 20%-97%	Operating Temperature: -25oC to +70oC
Reading Distance: <10cm	High compatibility with door locks	IP Security: IP43 Int. / IP56 Ext Available upon request
Response Time: <0.5secs	European cylinder profile	Custom finish by order

#### Different lock sizes available:

30 IN x 30 OUT = 60mm	Inox / Stainless Steel	ITEC999060140009	40 IN x 30 OUT = 70mm	Inox / Stainless Steel	ITEC999060140034
32.5 IN x 32.5 OUT = 65mm	Inox / Stainless Steel	ITEC999060140019	30 IN x 55 OUT = 85mm	Inox / Stainless Steel	ITEC999060140035
35 IN x 35 OUT = 70mm	Inox / Stainless Steel	ITEC999060140020	35 IN x 50 OUT = 85mm	Inox / Stainless Steel	ITEC999060140036
37.5 IN x 37.5 OUT = 75mm	Inox / Stainless Steel	ITEC999060140021	35 IN x 55 OUT = 90mm	Inox / Stainless Steel AWK	ITEC999060140037
40 IN x 40 OUT = 80mm	Inox / Stainless Steel	ITEC999060140022	50 IN x 30 OUT = 80mm	Inox / Stainless Steel AWK	ITEC999060140038
42.5 IN x 42.5 OUT = 85mm	Inox / Stainless Steel	ITEC999060140023	50 IN x 40 OUT = 90mm	Inox / Stainless Steel AWK	ITEC999060140039
45 IN x 45 OUT = 90mm	Inox / Stainless Steel	ITEC999060140024	30 IN x 35 OUT = 65mm	Inox / Stainless Steel AWK	ITEC999060140040
47.5 IN x 47.5 OUT = 95mm	Inox / Stainless Steel	ITEC999060140025	35 IN x 40 OUT = 75mm	Inox / Stainless Steel AWK	ITEC999060140041
50 IN x 50 OUT = 100mm	Inox / Stainless Steel	ITEC999060140026	40 IN x 45 OUT = 85mm	Inox / Stainless Steel AWK	ITEC999060140042
55 IN x 55 OUT = 110mm	Inox / Stainless Steel	ITEC999060140027	50 IN x 35 OUT = 85mm	Inox / Stainless Steel AWK	ITEC999060140043
60 IN x 60 OUT = 120mm	Inox / Stainless Steel	ITEC999060140028	45 IN x 50 OUT = 95mm	Inox / Stainless Steel AWK	ITEC999060140044
OE 32.5 IN x 32.5 OUT = 65mm	Inox / Stainless Steel	ITEC999060140029	35 IN x 65 OUT = 100mm	Inox / Stainless Steel AWK	ITEC999060140045
HE 32.5 IN x 32.5 OUT = 65mm	Inox / Stainless Steel	ITEC999060140030	35 IN x 30 OUT = 65mm	Inox / Stainless Steel AWK	ITEC999060140046
30 IN x 50 OUT = 80mm	Inox / Stainless Steel	ITEC999060140031	40 IN x 35 OUT = 75mm	Inox / Stainless Steel AWK	ITEC999060140047
30 IN x 40 OUT = 70mm	Inox / Stainless Steel	ITEC999060140033	45 IN x 40 OUT = 85mm	Inox / Stainless Steel AWK	ITEC999060140048